

Wall Pack



Oficina: (662) 215-63-98

Cel: (662) 296-93-44

Cel: (631) 115-09-89



Periférico Norte #9 local 3, casi esq. con Juárez.
Col. Modelo, Hermosillo Sonora.



Wattsgreen.com.mx



Watts Green


Wall Pack Series Specification



Product Features

1. Main structural components for lamp body is ADC12 Die-cast aluminum, with advantages of Shock Resistance, Corrosion Resistance.
2. High temperature resistance silicone seals, no atomization.
3. Electrostatic spray processing for Structural components.
4. Corrosion Resistance, fungus-proof testing for 1000hrs.
5. Imported PC material for optical lens.
6. IP65 Waterproof.
7. Application for Square,Billboard ,Parking Lot, Garden, Building, Factory, Warehouse, Stadium, Gas Station, etc.

Dimmension

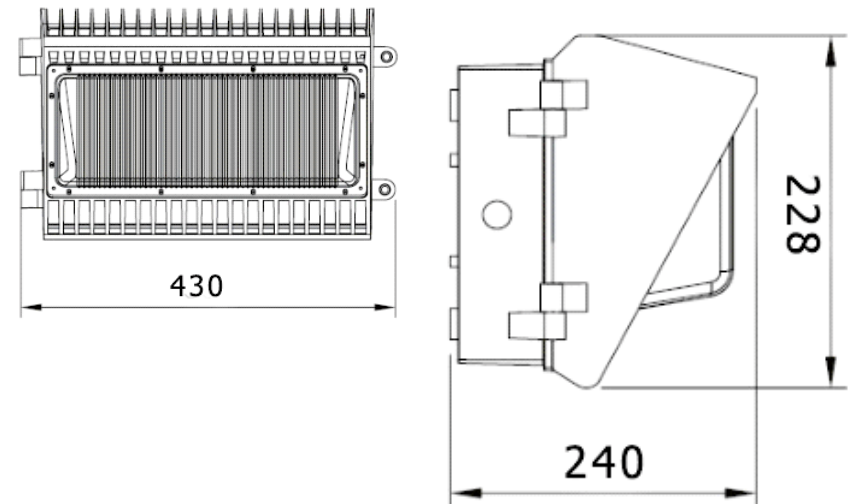

Package Details

Box Size	Pack Quantity	Gross Weight
395x325x260 mm	1 pcs/ctn	7.0 kg



Product parameters

Product Model	Power (W)	Size (mm)	Lumen (lm)	CCT (K)	Beam Angle	Voltage	Power Factor	CRI	Net Weight
WGCH-WPK-W40-S7	40	330×230×200	4000	2700/3000/4000 /5000/>6000	120°	AC 100-277V	>0.95	>83	3.28 kg
WGCH-WPK-W60-S7	60	330×230×200	6000	2700/3000/4000 /5000/>6000	120°	AC 100-277V	>0.95	>83	3.28 kg
WGCH-WPK-W100-S7	100	330×230×200	10,000	2700/3000/4000 /5000/>6000	120°	AC 100-277V	>0.95	>83	4.12 kg
WGCH-WPK-W120-S7	120	330×230×200	12,000	2700/3000/4000 /5000/>6000	120°	AC 100-277V	>0.95	>83	4.12 kg
Heat Sink Temperature		Operating Temperature		Storage Temperature		Equilibrium Temperature			
65°C		-20°C ~ + 65°C		-40°C ~ + 80°C		25°C			